


CATO Self-Drilling screws

Self-drilling screws with a drill-shaped tip, allowing for direct installation on various surfaces without the need for pre-drilling.

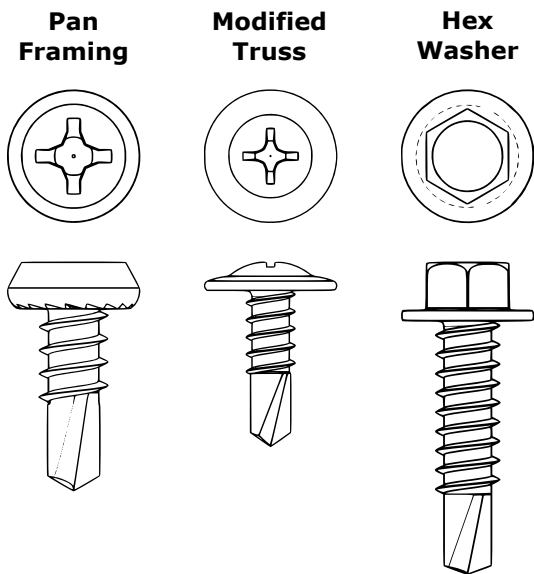

CATO Self-drilling

We manufacture our screws under the *ASME B18.6.3* and *IFI 113 (SAE J78)* standards, with a **HEART OF STEEL** and the highest quality standards. Our company is certified under the *ISO 9001:2015* standard to provide consistent quality to our customers.


We specialize in custom manufacturing according to your requirements, even in small batches.

Applications

- Light construction (Steel Framing)
- Roof and deck installation
- Sheet-to-wood joints
- Sheet-to-sheet joints
- Applications in aluminum and plastic


Drilling capacity

Material	Steel: 1022 & 10B22
Heat treatment	Case hardened min. HRC 45
Finish	Zinc plated >500h, High resistance >1000h*

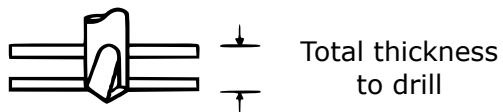

Steel Framing screws


Size	Length
#7	7/16"



Diámetro nominal	Longitud							
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
#10	•	•	•	•	•	•	•	•
#12		•	•	•	•	•	•	•
1/4"		•	•	•	•	•	•	•

Note: Upon special request, we manufacture other types of heads, recess, tips, and finishes, as well as lengths of up to 4" with partial threads of up to 3".

Also available with EPDM bonded washer for roofing applications!



Point type	Teks #3		
	#10	#12	1/4"
Nominal diameter	4.45	5.33	5.33
Drilling thickness (mm)			

*Hours in the salt spray chamber without red rust as per ASTM B117.

For additional information please scan the QR and contact us!

